

# FLOAT

FLOATING  
GREASE & SCUM SOLVENT



Float consists of a blend of petroleum hydrocarbons and orange terpenes. It is a floating combination of solvents used primarily to dissolve grease and scum that accumulates in grease traps, pumping stations, wet wells, and sewer lines.

Float can also be used for removal of many printing inks, rosins, ester gums, alkyd resins, tar and asphalt.

## Benefits

- CFC free
- Pleasant citrus fragrance
- Floating degreaser
- Economical
- Slow evaporation


## Applications

- Grease traps
- Wet wells
- Lift stations
- Sewage lines

## Technical Data

Brookfield viscosity .....	4 cps
Dilution .....	Ready to use
DOT .....	Not regulated
Flash point .....	122°F(C.C.)
Odor .....	Citrus
pH .....	N/A
Physical appearance .....	Green liquid
Emulsifier .....	None
Pounds/gallon .....	6.7

Please refer to the actual product label for specific directions.  
Contact your sales representative or customer service for further assistance.

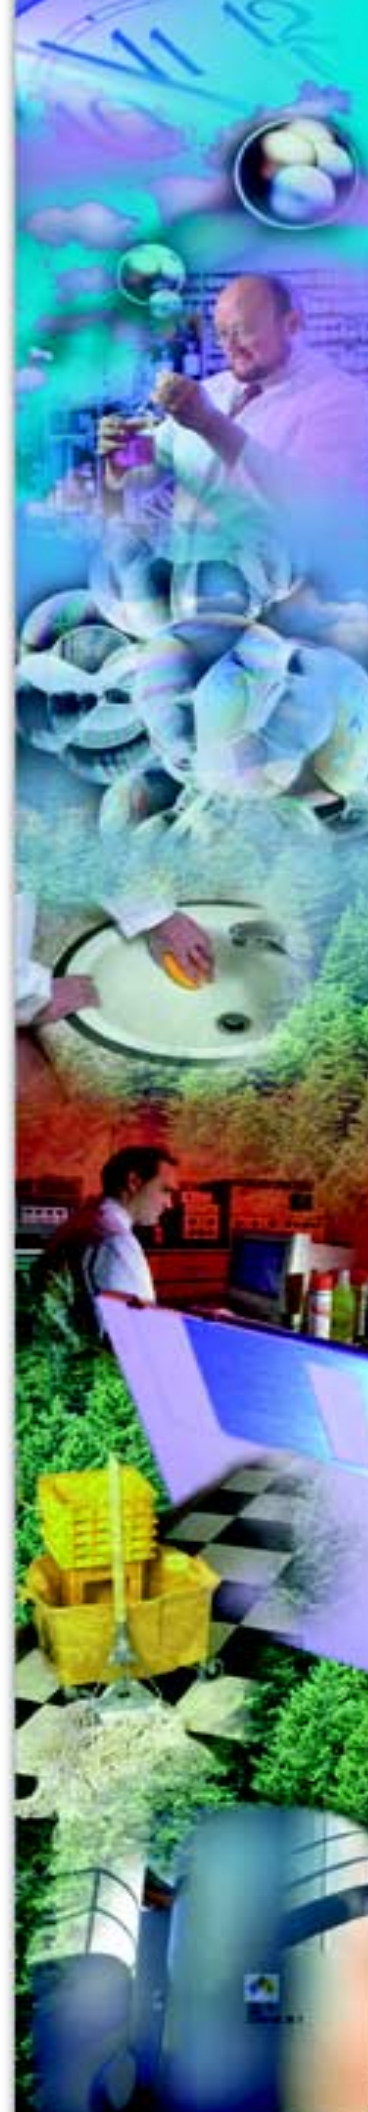



# Float

## FLOATING

### *Grease & Scum Solvent*

### Sewage Digester

- CFC free
- Floating degreaser
- Slow evaporation
- Economical
- Pleasant citrus fragrance

**CAUTION: KEEP OUT OF REACH OF CHILDREN**

FOR COMMERCIAL AND INDUSTRIAL USE ONLY  
OR FOR SALE TO, USE, AND STORAGE BY SERVICE PERSONS.

#### DIRECTIONS

**For Grease Traps:**

1. Start treatment immediately after the grease trap has been pumped. Add one quart per cubic foot of capacity, then begin preventive maintenance schedule one week later. Repeat procedure after pumping.
2. For traps where scum blankets & grease cakes have already formed add one gallon per cubic foot directly to the grease trap. Repeat every 3 to 4 days until the scum blanket is liquefied.

**Preventive Maintenance:**

One (1) gallon daily per 40 cubic feet of trap capacity.

**For Pumping Stations, Wet Wells, & Sewer Lines:** Add 1% - 5% by volume (i.e. 1-5 gallons per 100 gallons of capacity) as initial treatment. For preventive maintenance (daily application) use 0.25% (i.e. 1 quart per 100 gallons of capacity).

#### SOLVENT CLEANER:

This product is a solvent for removal of many printing inks, rosins, ester gums, alkyd resins, tar and asphalt. Test on an inconspicuous area before using on painted surfaces.

CAUTION: Combustible liquid. Contains Aliphatic Hydrocarbons and Orange Terpenes. Combustible. Keep away from heat and open flame. Do not take internally. Avoid contact with eyes.

#### FIRST AID:

Skin: Wash immediately with soap and water.

Eyes: Flush with water, if irritation persists, call physician.

Ingestion: DO NOT induce vomiting. Give 1 or 2 glasses of water to dilute substance and call a physician immediately. Never give anything by mouth to an unconscious person.

Inhalation: If symptoms of overexposure are experienced, evacuate to fresh air. Consult physician if breathing is difficult.

Primary Routes of Entry: Skin contact/Absorption and inhalation.

Target Organ Effects: Kidneys and lungs.

0956334/081996

NFPA/HMIS	Least - 0	Slight - 1	
CODES	Moderate - 2	High - 3	Extreme - 4

NFPA/HMIS: Health - 2, Flammability - 2, Reactivity - 0

Protective Equipment: Safety glasses and rubber gloves

DISTRIBUTED BY:

CONTROL  
NUMBER

NET CONTENTS  
GALLONS